

01-28-00

A

Please type a plus sign (+) inside this box [+]

PTO/SB/05 (12/97)

Approved for use through 09/30/00. OMB 0651-0032

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

01/26/00
j0600 U.S. PTO

UTILITY PATENT APPLICATION TRANSMITTAL
(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. 060531.P002

Total Pages 5

First Named Inventor or Application Identifier Peter M. Killcommons

Express Mail Label No. EL371011177US

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, D. C. 20231

j0564 U.S. PTO
09/491499
01/26/00

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. x Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)
2. x Specification (Total Pages 43)
(preferred arrangement set forth below)
 - Descriptive Title of the Invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claims
 - Abstract of the Disclosure
3. x Drawings(s) (35 USC 113) (Total Sheets 7)
4. x Oath or Declaration (Total Pages 4)
 - a. x Newly Executed (Original or Copy)
 - b. Copy from a Prior Application (37 CFR 1.63(d))
(for Continuation/Divisional with Box 17 completed) (**Note Box 5 below**)
 - i. DELETIONS OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
5. Incorporation By Reference (useable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. Microfiche Computer Program (Appendix)

7. _____ Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
a. _____ Computer Readable Copy
b. _____ Paper Copy (identical to computer copy)
c. _____ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. x Assignment Papers (cover sheet & documents(s))
9. _____ a. 37 CFR 3.73(b) Statement (where there is an assignee)
 x b. Power of Attorney
10. _____ English Translation Document (if applicable)
11. _____ a. Information Disclosure Statement (IDS)/PTO-1449
_____ b. Copies of IDS Citations
12. _____ Preliminary Amendment
13. x Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
14. x a. Small Entity Statement(s)
_____ b. Statement filed in prior application, Status still proper and desired
15. _____ Certified Copy of Priority Document(s) (if foreign priority is claimed)
16. x Other: A copy of the postcard w/express mail stamp (1 pg.)

17. If a **CONTINUING APPLICATION**, check appropriate box and supply the requisite information:
____ Continuation ____ Divisional ____ Continuation-in-part (CIP)
of prior application No: ____

18. Correspondence Address

____ Customer Number or Bar Code Label _____
(Insert Customer No. or Attach Bar Code Label here)
or
 X Correspondence Address Below
NAME Tarek N. Fahmi -- Reg. No.: 41,402
 BLAKELY, SOKOLOFF, TAYLOR & ZAFMAN LLP
ADDRESS 12400 Wilshire Boulevard
 Seventh Floor
CITY Los Angeles STATE California ZIP CODE 90025-1026
Country U.S.A. TELEPHONE (408) 720-8598 FAX (408) 720-9397

12/01/97

- 2 -

PTO/SB/05 (12/97)

Approved for use through 09/30/00. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Applicant or Patentee: Peter M. Killcommons Attorney's
Serial or Patent No.: Not Yet Assigned Docket No. 60531.P002
Filed or Issued: Herewith
For: SECURE NETWORK SYSTEM AND METHOD FOR TRANSFER OF MEDICAL
INFORMATION

VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS
37 CFR 1.9 (f) and 1.27(c) - - SMALL BUSINESS CONCERN

I hereby declare that I am:

- ☐ the owner of the small business concern identified below:
☒ an official of the small business concern empowered to act on behalf of the
concern identified below:

NAME OF CONCERN: MEDWED, INC.

ADDRESS OF CONCERN: 667 FOLSOM STREET, SAN FRANCISCO, CA 94107

I hereby declare that the above identified small business concern qualifies as a small business concern as defined in 13 CFR 121.3-18, and reproduced in 37 CFR 1.9(d), for purposes of paying reduced fees under Section 41(a) and (b) of Title 35, United States Code, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby certify that to the best of my knowledge and belief rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention entitled SECURE NETWORK SYSTEM AND METHOD FOR TRANSFER OF MEDICAL INFORMATION by inventor(s) Peter M. Killcommons described in

- ☒ the specification being filed herewith
☐ application serial no. _____, filed _____
☐ patent no. _____, issued _____

and I have reviewed the document that evidences the conveyance of those rights. That document

- ☐ is being filed herewith.
☐ was recorded in the Patent and Trademark Office on _____, 19 ____
at reel _____ and frame _____.

If the rights held by the above-identified small business concern are not exclusive, each individual, concern or organization having rights to the invention is listed below and **no rights to the invention are held by any person, other than the inventor, who could not qualify as a small business concern under 37 CFR 1.9(d) or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a non-profit organization under 37 CFR 1.9(e).** NOTE: Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27)

NAME: _____

ADDRESS: _____

[☐] Individual [☐] Small Business Concern [☐] Non-Profit Organization

NAME: _____

ADDRESS: _____

[☐] Individual [☐] Small Business Concern [☐] Non-Profit Organization


I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

NAME OF PERSON SIGNING: PETER M. KILLCOMMONS

TITLE OF PERSON OTHER THAN OWNER: PRESIDENT

ADDRESS OF PERSON SIGNING: 132 BEAUMONT, SAN FRANCISCO, CA 94107

SIGNATURE:  DATE: 1/21/2000

UNITED STATES PROVISIONAL APPLICATION
For

**SECURE NETWORK SYSTEM AND METHOD FOR TRANSFER OF MEDICAL
INFORMATION**

Inventors:
Peter M. Killcommons

Prepared by:

Lisa N. Benado
ON-SITE COUNSEL
2090 Williams Street
Palo Alto, CA 94306

&

BLAKELY SOKOLOFF TAYLOR & ZAFMAN LLP
12400 Wilshire Boulevard
Los Angeles, CA 90025-1026
(408) 720-8598

Attorney's Docket No.: 060531.P002


"Express Mail" mailing label number: EL371011177US

Date of Deposit: January 26, 2000

I hereby certify that I am causing this paper or fee to be deposited with the United States Postal Service "Express Mail Post Office to Addressee" service on the date indicated above and that this paper or fee has been addressed to the Assistant Commissioner for Patents, Washington, D. C. 20231

Patricia A. Balero

(Typed or printed name of person mailing paper or fee)


(Signature of person mailing paper or fee)

SECURE NETWORK SYSTEM AND METHOD FOR TRANSFER OF MEDICAL INFORMATION

RELATED APPLICATION

5 This application is related to and hereby claims the priority benefit of a provisional application entitled "Secure Network System and Method For Transfer of Medical Information" filed February 19, 1999, and assigned Application No. 60/120,823.

NOTICE OF COPYRIGHT

10 A portion of the disclosure of this patent document contains material that is subject to copyright protection. The copyright owner has no objection to the facsimile reproduction by anyone of the patent document or the patent disclosure, as it appears in the Patent and Trademark Office patent file or records, but otherwise reserves all copyright rights whatsoever.

FIELD OF THE INVENTION

15 The present invention relates generally to the transfer of medical information through a public network, and more particularly to a network system for secure communication of medical information across a virtual private network.

BACKGROUND

20 In many fields (e.g., medicine, manufacturing, veterinary science, scientific research, etc.), it is often necessary to examine a subject and communicate the results of the examination to a remote place. Such information exchanges are especially desirable in the
25 medical arena where it is often useful for medical practitioners to communicate medical information, such as patient test results, *e.g.*, radiology studies or cardiac studies, to other practitioners located in remote places. Telemedicine facilitates this exchange of

information. Telemedicine is generally the electronic transmission of medical data from one location to another for purposes of interpretation and consultation. Telemedicine is gaining interest in the medical community, in part due to an increasing shift in health care delivery from hospitals to physician offices, extended care facilities, ambulatory treatment centers and patients' homes.

The medical information communicated by telemedicine systems may be derived from a variety of different medical modalities. Such modalities may include sophisticated radiology equipment grouped as small matrix size and large matrix size instruments. Small matrix size systems include equipment for magnetic resonance imaging (MRI), computed tomography (CT), ultrasonography (US), nuclear medicine (NM) and digital fluorography. Large matrix size systems include equipment for computer radiography (CR) and digitized radiography (DR). Other data image acquisition equipment may be used for radiofluoroscopy, angiography, such as x-ray angiography and heart scanning. Still other equipment of great usefulness in acquiring medical information includes secondary capture devices for video, endoscopy, microscopy, and photography, such as digital cameras, scanners, electrocardiogram (ECG) machines, and the like.

The resulting medical information may take numerous forms, including text, images and video, or variations thereof, such as image overlay data, measurements, coordinates, etc. Information may also be in the form of time-dependent data including sound, such as audio dictation, and waveform data. The data may be static representations of time-dependent forms, such as curves. Thus, it is advantageous for telemedicine systems that may need to transfer the data and/or information to be flexible, so as to accommodate this variety of information/data from multiple modalities.

Typically a medical study on a patient results in a very large data file which may include a combination of data forms. For example, an MRI study on a patient may include text and about 100 images, each of which may be 300 to 500 Kb in size, leading to a study of 50 to 80 Mb total of data. This large amount of data presents a particular problem for the

rapid sharing of medical information. Time is often of the essence during healthcare decision making. For example, an attending practitioner may need to obtain immediate advice on caring for a patient from a remotely located specialist. Therefore, it is critical that telemedicine systems transfer large data files in a timely fashion.

5 It is also important that telemedicine systems provide for the transfer of such large amounts of data without data loss. Some medical industry standards require that medical information transferred by telemedicine systems maintain sufficient detail for accurate interpretation by the practitioner. Multi-specialty DICOM Standards describe acceptable parameters to manage delivery of multimedia medical information. The DICOM Standards
10 were originally published by an ACR-NEMA committee sponsored by the American College of Radiology and the National Electrical Manufacturers Association as Digital Imaging and Communications in Medicine (DICOM), NEMA Publications PS 3.1-PS3.12, by The National Electrical Manufacturers Association, Rosslyn, VA, 1992, 1993, 1994, 1995. These DICOM Standards define the form and flow of electronic messages that
15 convey images and related information between computers through TCP/IP. Therefore, it is desirable for medical information transfer systems to acquire and transmit complex data, such as radiology images, in a manner that complies with the DICOM Standards. See, e.g., Bidgood, et al., "Understanding and Using DICOM, the Data Interchange Standard for Biomedical Imaging," J. Am. Med. Informatics Assoc., 4:3, 199-212, May-June, 1997. The
20 transferred information should be presented in the context and form that is most helpful for practitioners to make sound health and wellness decisions.

The medical profession is also under a strict duty to protect the confidentiality of patients' medical records. Thus, protection of medical data/information in telemedicine is of paramount importance. Most telemedicine systems include some form of security
25 measures such as the use of passwords. Password identification determines whether a user is authorized to gain access to a system. However, passwords are insufficient mechanisms

to maintain patient confidentiality from intruders who gain knowledge of a user's password to log onto a system and "man in the middle" attacks on the Internet.

For secure and fully private long distance communications, point-to-point connections between sites have been employed. Private networks, such as wide area networks (WAN's), are typical. Unfortunately, these systems are inflexible and involve prohibitive costs. Large telemedicine networks that span long distances, *e.g.* across continents, become too costly for current conventional private WAN architecture. Since all sites must be hardwired, the addition of new sites to the network is inconvenient. A medical enterprise must install and support terminal equipment and software for each WAN site.

Furthermore, the volume of information designated to travel over the network may overload the system. For example, rural medical sites may only have access to poorly maintained telephone lines that are an inadequate medium for transmission of medical data.

Public networks provide a flexible and inexpensive option for long distance inter-networking. Each of the remote sites in a medical network need only be connected to a local Internet provider. Adding new connections is simple and inexpensive. Once connected to a local Internet provider, a site can quickly connect to any destination around the world allowing a practitioner at one location to interpret medical test results and consult with another practitioner located elsewhere.

There are few places of the globe that the Internet can not reach. Medical information transfer systems that employ the Internet may allow for remote locations, such as third world countries that do not have an attending specialist, to access needed medical expertise. Furthermore, emergency care may be provided where a practitioner is temporarily away, *e.g.*, at home or on vacation. See, *e.g.*, Thrall JH, Boland G., "Telemedicine in practice", *Seminars in Nuclear Medicine* 28(2):145-57, Apr. 1998.

However, traditionally medical networks have avoided transfer of information over the Internet, in part, because of security constraints. The Internet includes public segments, where the same infrastructure is shared by potential competitors, hackers, and the

like. Such public networks expose the medical enterprise to at least the following two dangers: (1) unauthorized Internet access into the medical network and (2) eavesdropping on and tampering with a communication as it passes through the Internet.

A virtual private network (VPN) may use both private and public network segments or entirely use public segments *e.g.*, the Internet, to link resources together into a single network. Encryption technology employed at connections between private and public networks can be used to protect the data transferred between such networks as if the connection between them was entirely private. Such use of encryption in virtual private networks provides some security measures for the transfer of sensitive information.

Another problem with the use of the Internet is that the heavy traffic flowing over public connections may lead to delay problems in the transfer of the large amounts of data. Most Internet systems are not structured to allow for quick transfer of the volume of data files that are typical of medical information. Transfer efficiency depends on, *inter alia*, characteristics of the network segments that the packets must traverse, congestion on those segments and efficiency of the dispatcher. High delay environments include satellite connections, national links and international links.

Furthermore, where more data is attempting to flow between two points than a public system can handle, the data packets are simply thrown away by overloaded routers. Lost packets must be resent by the dispatcher, typically in a manner that is time consuming and renders the telemedicine system unusable. Transfer systems used to transmit data compliant with DICOM standards are usually designed to abort incomplete file transmissions and to restart the transfer from the beginning of the file, rather than just resending the failed packets. Telemedicine systems that employ mechanisms used to compensate for latency and loss of data in transfer are of great interest.

Moreover, typical transfer systems that are used to transmit DICOM compliant data are not appropriately configured to transfer data over the Internet. These systems have IP addresses that are suitable to destinations within a local area network. However, often these

same IP addresses are unacceptable for the routers on the Internet. This factor, compounded with an overall shortage of routable IP addresses available for transfer systems in general, makes transfer of medical data directly from medical modalities across the Internet complicated.

- 5 Thus, in light of the shortcomings of the various currently available systems, there is still a need for secure medical transfer systems that allow for transfers of large amounts of data in a timely and efficient manner. In particular, there is a desire for telemedicine systems that use an encrypted and reliable Internet protocol to create a protected communication pipeline. Moreover, there is a need for systems that can move DICOM or
- 10 other medical data between hosts by providing routable IP addresses.

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214

SUMMARY OF THE INVENTION

In one embodiment, a transmitter is provided for sending medical information into a network. At least a portion of the network includes secured public channels to create a virtual private network. The transmitter includes a data interface for acquiring medical data and a network interface for transferring the medical data into the network for receipt at a disassembly structure. An assembly unit may be used to gather the medical data acquired by the transmitter and to form packets that include such data. In some cases, the transmitter includes a remapping unit to attach an address to the packets for identifying the disassembly structure that is to receive the packets as well as receiving station(s) for the medical data's ultimate destination(s). In one embodiment the remapping unit attaches alias application entity titles (alias AE titles) to the packets. The remapping unit may also serve as a network address translator (NAT) to attach routable IP addresses to the packets.

Often, the transmitter will include a processing unit configured to encrypt the medical information across protocol layers prior to the packets being sent into the network, thus providing confidentiality during the data transfer. Internet Protocol Security (IPSec) Standards may be employed by the processing unit for providing these secure data transfers. In other configurations, the processing unit may be configured to authenticate and/or provide key management to the packets across protocol layers. The transmitter may further include a firewall. One such firewall has a network port at the data interface and another network port at the network interface.

The transmitter may employ mechanisms for conserving the time it takes for transfer of a medical study to the disassembly structure. In one such mechanism, the assembly unit compiles large amounts, *e.g.*, between 0.1 megabyte and 5.0 megabytes, of data into packets. A confirmation unit in the transmitter may receive acknowledgement of a completed packet transfer within a threshold time. In some cases, the threshold time may be set at 1 to 500,000 msec. Then, in some embodiments, only the packets to which no acknowledgement is received within the threshold time are resent.

The medical information transferred by the transmitter may be text, image, overlay, 3-D volume, waveform, curve, video or sound data, or any combination thereof. The data entering the transmitter is preferably in compliance with DICOM Standards and/or HL7 Standards. In some cases, the transmitter changes the form of the data to not conform to DICOM Standards and the
5 disassembly structure reconfigures the data to adhere again to DICOM Standards.

Another embodiment provides a medical virtual private network system that includes at least one medical modality to generate medical data. This data may be sent to an information transmitter through an associated data interface. One or more disassembly structures
10 communicatively coupled to the transmitter through the network may receive the data in the form of packets transmitted by the transmitter. Such disassembly structures decrypt the data packets and relay the data to at least one receiving station. The disassembly structure optionally is a transmitter, including features of both the disassembly structure to receive data and a transmitter for gathering data from modalities and sending the data over the network.

Still other embodiments may provide a computer readable medium having stored
15 therein a plurality of sequences of instructions, which when executed by a processor, cause the processor to perform certain steps. Among these steps may be included the steps of assembling medical data into packets; remapping IP addresses or alias AE titles to the packets for identifying a disassembly structure; encrypting the packets across protocol layers; and/or sending the packets into a public network for receipt at the disassembly
20 structure. Of course, other embodiments may provide only the instructions themselves or methods of performing these steps.

Other features and advantages of these and other embodiments are discussed in detail below.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention is illustrated by way of example, and not limitation, in the figures of the accompanying drawings in which:

Figure 1 illustrates one embodiment of a medical virtual private network

5 configured in accordance with the teachings presented herein.

Figure 2 is a block diagram of one embodiment of a transmitter configured in accordance with the teachings presented herein.

Figure 3 is an example of a table of a relational database that may be used by the remapping unit of a transmitter in accordance with the methods described below.

10 **Figures 4A-4B** illustrate the fields of a secured medical data packet in accordance with the teachings presented herein, wherein Figure 4A shows a packet constructed in accordance with IPsec Standards using AH protocol and Figure 4B shows a packet with constructed in accordance IPsec Standards using ESP protocol.

15 **Figure 5A-5B** are a flow diagram of methods of resending incomplete transmissions, wherein Figure 5A shows a process to reduce transfer time for transmission of a medical data file in accordance with the present methods and in Figure 5B shows a prior art process of resending an entire data file.

Figure 6 is a block diagram of one embodiment of a disassembly structure and a receiving station configured in accordance with the teachings presented herein.

20 **Figure 7** illustrates one embodiment of a secure network system with multiple sites, modalities and receiving stations any or all of which may be configured in accordance with the teachings presented herein.

DETAILED DESCRIPTION

The Medical Network System and Method for Transfer of Information described below is configured to provide reliable, secure and flexible communication of medical information including medical images and clinical data to remote facilities and users. The system utilizes a transmitter that includes a variety of safeguard services to provide this protected network environment across the Internet. The transmitter is further configured to permit easy additions of new sites to the network. By incorporating efficient packet assembling and receiver acknowledgment techniques into the system, bulky medical information may be rapidly transferred to any desired destination.

Figure 1 illustrates an exemplary secure network system **10** configured in accordance with one embodiment of the present invention. A modality **12** is coupled to a transmitter **20** through a DICOM converter **14**. A disassembly structure **50** receives communication from the transmitter **20** across a public network **16**. The disassembly structure **60** may send the medical information to receiving station **80**, which station may optionally display, manipulate, store and/or print data captured/provided by modality **12**. The disassembly structure **50** may also transmit an acknowledgment of receipt of such medical information to the transmitter **20**. It should be noted that the scope of the present invention anticipates any number of modalities, transmitters, disassembly structures and workstations configured in accordance herewith and arranged in various fashions.

The modality **12** may be any type of device that generates data or data signals related to the examination of a subject. The subject is preferably a human being or an animal (or a portion of either thereof), but may also be an inanimate object that is being inspected. The modality may perform the direct examination of the subject, where the modality includes a detection component. Alternatively, the modality **12** may create data or signals from a user's input, where the modality has an input component such as a keyboard, mouse, microphone, etc.

Although the modality **12** may pertain to the examination of a subject in any number of fields, such as manufacturing, veterinary science, scientific research, etc., the modality is preferably a medical device to retrieve data related to a subject's physical condition. Medical modalities used in radiology include data acquisition equipment for magnetic resonance imaging (MRI), computed tomography (CT), ultrasound (US), nuclear medicine (NM) and digitized radiography (DR), computer radiography (CR) and digital fluorography. Other modalities include photographic devices such as high resolution digital cameras; sound capture interfaces such as verbal dictation interfaces, Sound Blaster™ interfaces, and the like; video capture interfaces such as Snappy® brand parallel port video capture devices; flatbed scanners and especially Twain compliant acquisition devices such as Visioneer Paperport®. Still other modalities are for angiography, radiography, endoscopy, microscopy, physical exams and waveform devices to collect EEG and/or ECG data, such as from Hewlett Packard Corporation of Palo Alto, CA and American Medical Devices Corporation of Lowell, MA. In addition, the present invention anticipates other modalities and all of the aforementioned modalities are by way of example, and are not intended to limit the choices that are or may become available in the art. The data may be captured by such devices with assistance of specialized software, such as the plugin or ActiveX control technologies, as described, for example, in copending patent application, U.S. Serial No. 09/199,611.

The data that is captured by the modality **12** and transferred by a secure network system configured in accordance with the present teachings may take numerous forms. Some common formats include text, images, video, sound, such as audio dictation, waveform, curves, and/or combinations or variations thereof. Medical data of this sort may be grouped into various types. Where the data entering the transmitter are medical data, the data may be formatted to be in compliance with several medical standards, for example DICOM and HL7 Standards. Clinical data is information acquired by a medical modality during the examination of a patient and relates to the patient's physical health. Examples

of clinical data may include radiology images, camera photographs, sound recordings, and the like. Parameter data is another type of data representing criteria surrounding the acquisition of clinical data. Parameter data includes the settings of the medical modality acquiring the clinical data, relationships of multiple sets of data such as overlay data,

5 timing of the data acquisition, measurements, coordinates, and the like. The parameter data includes some of the information required by the DICOM Standards for stored and transferred medical files. Other medical data may include 3-D volume data; series data for all clinical data in a medical series, e.g., coronal slices vs. axial slices in a CT exam or echoes as T1 slices vs. T2 slices in an MRI exam; annotation data for notes made by a
10 practitioner, usually relating to the clinical data; and background data such as patient history and/or physical examination information.

DICOM Standards require that transferred data have application entity titles (AE titles) to designate the applications and stations which are to ultimately receive the data. In addition to AE titles, the DICOM Standards also require that transmitted data include IP
15 addresses and a port numbers to identify the medical data's final destinations. The modality generating the data may attach individual AE titles for every receiving station to acquire the data, as well as IP addresses and port numbers.

In a preferred embodiment of the present invention, the use of an AE title is extended to define the disassembly structure for which the data is intended and optionally
20 other useful information such as directions on the compression and encryption associated with the transferred medical data. This additional information is captured within an alias AE title that is attached to the data. The alias AE title may be recognized by all transmitters and disassembly structures located in a particular medical network. Whereas a normal AE title is used to identify a receiving station by devices which connect directly to the station,
25 an alias AE title is used for data transferred through an intermediary disassembly structure, according to the present invention. For example, local devices, such as within a LAN, may use an AE title to direct information straight to the receiving station, but a device

connecting to the same station through a transmitter and disassembly structure gateway may use an alias AE title. Often, a particular alias AE title is designated by the disassembly structure associated with each receiving station and any transmitter sending information to that disassembly structure must use its alias AE title.

5 As shown in Figure 1, the dicom converter **14** receives data from modality **12** and conveys the data to transmitter **20** where it may be processed and sent to disassembly structures **60**. Dicom converter **14** is an optional component to the secure network system **10** that converts the raw data into DICOM compliant data. Dicom converter **14** may be a stand-alone device, such as Dicomizer[™] (by Nexsys Electronics, dba. Medweb Inc. located
10 in San Francisco, CA) or alternatively, may be an integral part of a computer system for controlling the operations of the modality. In the latter case, the modality is equipped to output data conformant with DICOM Standards.

The transmitter **20** in secure network system **10** is any device, such as an IP host, computer or server (and may include a firewall or router) that receives medical data and
15 transmits the data through a network. Preferably at least a portion of the network is a public network, e.g., a virtual private network or the Internet. The transmitter may be a server as described in copending patent application, U.S. Serial No. 09/199,611, the contents of which is herein incorporated by reference in its entirety, and further includes the transmitter components to be described below.

20 As shown in **Figure 2**, transmitter **20** has components for handling data in various ways. These components include a data interface (DI) **22** to receive newly acquired data, an assembly unit **24** for gathering together information, a remapping unit **26** for attaching addresses to the data, a processing unit **44** for manipulating the data and a network interface **50** for sending the information so processed. Upon review of this specification, it will be
25 appreciated by those skilled in the art that the components of transmitter **20** may be connected in various ways in addition to those described below.

In one embodiment, modality **12** may communicate with the data interface **22** through an Ethernet connection (i.e., the data interface **22** may be an Ethernet port). However, other communication schemes are suitable for transfer of data from modality **12** to transmitter **20**, such as serial interfaces, parallel interfaces, RS422 and/or RS432 interfaces, Livewire interfaces, IEEE-1394 serial busses, Appletalk busses, ATM busses and/or networks, token ring and/or other local area networks, universal serial buses, PCI buses and wireless (.e.g., infrared) connections, and the like.

Now referring in more detail to the transmitter components shown in **Figure 2**, an assembly unit **24** may be coupled to the data interface **22** and gathers newly received medical data to form packets. The assembly unit **24** breaks messages into packets, e.g., as according to the TCP protocol.

In a preferred embodiment, the assembly unit groups an amount of medical data into each packet that is larger than what is typically assembled into a packet traveling across the Internet. Generally, Internet procedures, *e.g.* TCP/IP, assemble about 750 bytes to 1 kilobyte of data into a single packet. In contrast, according to this embodiment, assembly unit **24** collects greater than 1 kilobyte of data and usually between about .10 megabytes to 5.0 megabytes and more usually about 1 megabyte of data. In one example, a MRI study is 80 megabytes. By current Internet procedures, each packet of data may include 1 kilobyte of data and take 300 msec to travel from a server across the Internet and to its destination. Consequently, the entire study takes at least 400 minutes to be transferred, assuming that every packet arrives to its destination the first time that they are sent. By comparison, in one example of the present invention, 1megabyte of medical data of the same 80 megabytes MRI study is assembled into each packet. As a result, the number of packets is reduced by 1000 fold.

These larger packet sizes shorten transfer times by reducing the number of packets per study that must travel across often lengthy distances to reach their destination. For example, each packet sent via satellite transmissions may need to voyage about 50,000

miles. Moreover, fewer acknowledgment-of-receipts are needed to be sent for each packet by the disassembly structure. The result is significant savings in the time it takes for a medical study to be communicated to a disassembly structure.

In another embodiment, the assembly unit is configured to gather the medical data into very small packet of message transfer unit (MTU) sizes. For example, each packet may be 50 bytes to 500 bytes, and usually 50 to 200 bytes, and more typically 50 to 100 bytes. These very small MTU's are particularly useful in transmitting data across congested networks. In congested Internet environments, decreasing the size of a MTU to less than 1.0 kilobyte may effect successful transport of packets through congested routers, where the routers tend to lose larger packets.

Transmitter **20** is further equipped with a remapping unit **26** for assigning destination addresses to the data. The remapping unit **26** may be coupled to the assembly unit. The attached address may be several different formats, such as alias AE title, IP address, etc.

In one embodiment, the remapping unit reads the header text that identifies the receiving stations for the data, determines the disassembly structure for that receiving station and attaches the address for the disassembly structure to the packet.

In another embodiment, the destination address is an alias AE title. In this configuration, remapping unit **26** reads the AE titles to the receiving stations that are to be the data's ultimate destinations. As shown in the table in **Figure 3**, a relational database **28**, usually in the form of a table, is used to cross-reference the AE titles **30**, to identify the disassembly structures that are associated with each of the data's intended receiving stations. The disassembly structures' alias AE titles **32** are then determined and attached to the data packets.

In still a further embodiment, the destination address attached by remapping unit **26** is a routable IP address **34** to the disassembly structure. The remapping unit **26** acts as a Network Address Translation (NAT) component. The term "routable IP address" refers to

an IP address that designates a disassembly structure or transmitter and is acceptable by routers to direct the packets across the Internet. The routable IP address is usually globally registered. The term “private IP address” refers to the IP address for a receiving station associated with a disassembly structure or the IP address for a modality that is the source for data transferred by a transmitter. Usually the private IP address is not routable across the Internet.

Whereas DICOM Standards require that each destination device be directly addressable, the remapping unit **26** may allow all of the receiving stations to share the same routable IP address to the disassembly structure. After the disassembly structure receives the data packets, the disassembly structure delivers the data to the appropriate receiving station. Similarly, the private IP address for each modality source of the data may be substituted for a routable IP address to the transmitter. Thus, replies received by the transmitter may have the source modality’s private IP address restored and the replies are directed to the appropriate source. In this manner, one may transfer DICOM compliant data across the Internet without having to register numerous IP addresses.

Often the remapping unit **26** performs both AE title remapping and NAT. The database **28** may list the alias AE titles **32**, routable IP addresses **34** and port numbers **36** for each disassembly structure. An unlimited number of AE titles and IP addresses may be stored in the database, and usually between 50 and 100. The IP addresses and port numbers, and optionally the AE titles, for each appropriate disassembly structure is attached to the data packets. In an exemplary embodiment, the database also retains information on the compression ratios **38** and types of security, such as encryption **40**, which should be used to transmit the data. Thus, in one embodiment, after remapping, the packets include the data as well as the following: a disassembly structure’s routable IP address and port number; an alias AE title to the disassembly structure; and a receiving station’s AE title, private IP address and port number.

In one case, the packets leaving the transmitter are no longer compliant with DICOM Standards . For example, alias AE titles may be provided rather than the DICOM specified AE titles. The packets may become DICOM compliant again by the disassembly structure restoring appropriate DICOM information, *e.g.* AE titles, to the data prior to transferring the data to the receiving station.

In an alternative embodiment, the remapping unit examines the content of the data for information and uses this information to determine which receiving station and disassembly structure is to receive the data. The remapping unit then attaches the appropriate address to the packet. One example of content-based information is the type of medical data in each packet, wherein the receiving station is designated to accept a specific type of data. In one example, the data is a mammogram and the data is automatically forwarded to a remote mammogram-screening center. A processing unit **44** in the transmitter **20** provides a mechanism to process the data packets prior to data transmission via various manipulation components, *e.g.*, encryption component **46**. For example, processing unit **44** may be a general-purpose processor that transfers data to and from the manipulation components. Alternatively, processing unit **44** may be a processor configured to execute instructions defined by manipulation components (*e.g.*, where encryption component **46** is a computer program). Commonly, the processing unit **44** is coupled to the assembly unit or remapping unit.

The encryption of data by encryption component **46** provides for secure transmission of data to the disassembly structure, usually by scrambling the message, whereas the disassembly structure may be used to decrypt, or unscramble, the data. Some types of encryption include Internet Protocol Security (IPSec) for providing encryption of all traffic between two security gateways, *e.g.* the transmitter **20** and the disassembly structure **60**, secure socket layer (SSL) and transport layer security (TLS) for securing Web browser communications and pretty good privacy (PGP) for protecting e-mail communications.

In some cases the processing unit **44** is also configured to authenticate the packets. Authentication validates the sender of a packet, prevents undetected modification to a packet's content in transit and stops address spoofing attacks by protecting IP addresses, port numbers and AE title fields. Authentication may be through use of a digital signature
5 to identify the author of a message.

In other embodiments, the transmitter **20** is further configured to provide key management to the packets. The present medical network requires that only the transmitter **20** and disassembly structure **60** be assigned keys. Thus, the present scheme allows for fewer keys to be distributed, compared to other systems that require all receiving stations to
10 have keys.

Either manual or automated key management may be employed, and usually an automated system is used. In preferred embodiments, an Oakley Key Determination Protocol is employed with Internet Security Association and Key Management Protocol (ISAKMP).

15 Other security measures may be taken to provide nonrepudiation by providing cryptographic receipts. In this manner, an author of a message may not falsely deny sending the information.

Such security services, *i.e.*, encryption, authentication and key management, preferably conform to IPSec Standards, as developed by William Stallings, the Internet
20 Engineering Task Force to provide end-to-end security for packets. See, *e.g.*, Cryptography and Network Security, 2nd ed., Prentice Hall, NJ, pgs. 399-440, 1999. IPSec provides security services at the IP layer, *i.e.*, optional in IPv4 and mandatory in IPv6, and below the transport layer, *e.g.*, TCP, UDP, so it is transparent to applications and end users.

The security benefits of IPSec are numerous. IPSec provides for connectionless
25 integrity to verify that messages are not modified in transit by using an authentication data field, data origin authentication, confidentiality and limited traffic flow confidentiality. In one embodiment of the present invention with IPSec, replayed packets are rejected by use

of a sequence number field to increase a number counter for each packet that is sent to a particular disassembly structure. The disassembly structure verifies that the packet has not yet been received if the number has not yet been accounted for or discards packets with replicated sequence numbers.

5 The processing unit may attach headers to the packets in accordance with IPsec. Where authentication is provided by the transmitter, the header of a protocol, Authentication Header (AH), is attached to the packet. AH is described in RFC 1826. In one preferred embodiment, both authentication and encryption are provided by a header for the protocol, Encapsulating Security Payload (ESP). ESP is described in RFC 1827. Both
10 RFC 1826 and 1827 are updated in RFC 2206.

 The present scheme also anticipates use of either transport mode or tunnel mode for transferring packets across the secure network, and more often tunnel mode is used. On occasions where transport mode is used, the upper-layer protocols are protected. For example, the AH or ESP header is inserted after the original IP header and before the TCP
15 segment. The part of the packet not required for routing is encrypted.

 In tunnel mode, the transmitter protects the entire IP packet, such that the entire packet is encrypted and placed inside of another packet with normal routing information. This is done at a level in the kernels of the transmitter between the basic routing and the socket layer code. The transmitter treats the security fields as a new outer IP packet that
20 encapsulates the original packet. For example, the AH or ESP may be inserted between the original IP header and a new outer IP header containing sufficient information for routing. In exemplary encapsulated packets shown in **Figures 4A and 4B**, the data packet **100** has an outer packet **102** that contains, an alias AE title (not shown), a routable IP address **104**, and port number **106** to the disassembly structure. The inner packet **122** carries the IP
25 address **124**, port number **126**, and AE title **128** to identify the receiving station, as well as the transport layer header **132**, such as TCP, UDP and ICMP, the data **130** that was assembled by the transmitter and a compression header **134**. Typically, no intermediate

routers along the communication line may examine the inner IP header. These interim machines do not know that the packets they are passing are encrypted.

In **Figure 4A**, an ESP header **108**, ESP authorization header **112** and ESP trailer **110** is also added to the outer packet. The ESP trailer **110** may include padding, pad length and next header fields. In **Figure 4B**, an AH header **114** is added to the outer packet instead of the ESP header **108**, ESP authorization header **112** and ESP trailer **110**.

Transmitter **20** also includes a network interface **50** configured to send the packets into the network connection and to disassembly structure **60** such as with the IP protocol.

The transmitter **20** may further include an acknowledgement unit **48** that is configured to receive acknowledgements that a disassembly structure **60** has received a packet sent by the transmitter . The transmitter **20** may have a predefined threshold of time (as maintained by an internal timer) in which an acknowledgement unit **48** will consider a received acknowledgment as representing a successful transfer of a packet. In preferred embodiments, the threshold time is longer than the threshold time used in typical Internet systems and is generally about 1 to 500,000 msec and more typically 100,000 to 250,000 msec. The chosen threshold time may be set to correspond with the latency in transmission which may depend, *inter alia*, on the type of transmission pipeline across which the packets travel. For example, where the packets must traverse very long distances, such as via satellite transmissions, the latency may be longer and threshold time is accordingly extended. In addition, where the packets must travel across congested lines, a longer threshold period is used. In this manner, the transmitter **20** avoids considering packets lost in cases where the acknowledgment may take longer to be received.

If acknowledgement unit **48** does not receive an acknowledgement for a packet within the threshold time, the packet is considered lost and the connection between transmitter and disassembly structure breaks. Where a single packet of a series of packets comprising a study is lost, conventional protocols require that connection become re-opened and the entire study be resent from the starting packet. Thus, even packets that were

initially received by the disassembly structure and for which acknowledgments were successfully sent, are transmitted to the disassembly structure again. This redundancy in transmitted packets wastes precious time in transmitting a medical study.

However, a preferred embodiment of the present invention avoids redundant transmissions of packets by including procedures in which the transmitter **20** only sends those packets for which acknowledgment is not received, rather than sending all packets over again. The present network system adds another level of intelligence that closely links the software components which track file transmission progress, *i.e.* how much of the file has been transmitted, with the underlying transmission protocol which tracks packet loss and retransmission. As a result, the socket connection may be opened and closed many times over the course of transmitting one file, but the file transmission always makes progress when the connection is up, rather than starting over.

Such an algorithm **150** performed by the acknowledgement unit **48** is shown in **Figure 5** to efficiently send a data file **152** having a first packet **154**, second packet **156** and third packet **158**. The transmitter sends (step **160**) each of the packets comprising the data file **152** for a medical study to the disassembly structure. The transmitter questions (step **162**) whether an acknowledgement response has been received for each of the transmitted packets within the threshold period of time. If the acknowledgment is not received, the transmitter considers the entire data file with all packets and identifies (step **164**) the lost portion of the data file **150** to which no acknowledgement was received within the threshold period of time. The transmitter resends only those lost portions of the data file **150**. If acknowledgment is received within the threshold time, the transmission is considered complete (step **166**). In past schemes as shown in **Figure 5B**, where an acknowledgement is not received within a threshold time, the transmitter is required to resend all the packets that make up the data file.

Referring once again to **Figure 1**, the remote disassembly structure **60** and transmitter **20** may be in communication through a variety of connections. **Figure 6** shows

one example of a disassembly structure **60** with a transmitter connector **62** through which the transmitter communicates with the disassembly structure. Typically, transmitter connector **62** is a hypertext transfer protocol (HTTP) connection. The association between the transmitter and disassembly structure is usually a dedicated connection, *e.g.* public network. The connection may be a telephone line. The communication link may be also made by a serial line Internet protocol (SLIP), point-to-point protocol (PPP), an XDSL link, a satellite or other wireless link, a cable modem, ATM network connection, an ISDN line, a DSL line, or other communication link. ISDN lines and DSL lines are useful because they are digital technologies, thus obviating any need to convert information from digital to analog form prior to transmission.

Where tunnel mode IP security is provided to the packets, the disassembly structure **60** examines the outer IP header and any outer IP extension headers of the received packet and de-processing unit **64** reconstructs the data. The de-encapsulating unit **66** of the de-processing unit **64** strips off the outer IP header. The disassembly structure also may decrypt **68** the packet to reveal the inner packet, such as by using a security parameters index (SPI) in the ESP header.

The IP address, AE title, header or other such identifier of the receiving station is read and the inner packet with medical data is transferred to the appropriate receiving stations **80**.

Preferably the inner packet is converted to be compliant with the DICOM Standards (*e.g.*, with IP address, port number and AE title) by dicom converter **70** before being relayed to the receiving stations **80**. The dicom converter **70** may convert various types of data to be DICOM compliant, such as video, CT data, twain data, etc. Such conversion software may be conveniently acquired through a plug-in or Activex control.

The disassembly structure **60**, through the use of an acknowledgement transfer unit **72** may be configured to send acknowledgments to the transmitter **20** for each data packet that is successfully received by the disassembly structure **60**. Thus, the disassembly

structure is able read the packet to determine the appropriate transmitter to receive the acknowledgment. The acknowledgment packet is small relative to the medical data packet, *e.g.*, 5-10 bytes.

In another configuration, the disassembly structure **60** includes elements of a transmitter **20**, configured to transmit medical data as well as elements to receive medical data from another transmitter. Thus, all of the features of the disassembly structure **60** and transmitter **20** are incorporated into one unit. In still other configurations, the receiving station **80** includes the disassembly structure **60** and is configured to de-process the packets and/or or includes all features of a transmitter **20**.

The communication between the disassembly structure **60** and the receiving station **80** takes place through a station interface (SI) **74** of the disassembly structure **60**. The communication pathway may be through various mechanisms and usually through a LAN or a WAN. Multiple receiving stations **80** may be connected to receive information from the disassembly structure **20**.

Receiving station may be any device configured to receive the data, *e.g.*, a workstation, archive, worklist manager, modality, or DICOM compliant device. In one preferred embodiment, the receiving station **80** may include a platform **82**, *e.g.*, a personal computer (PC), such as a Windows™-based PC, Macintosh™, or one of a wide variety of hardware platforms that runs the UNIX™ operating system. The receiving station **80** may further includes a display **84**, which is coupled to the platform **82** through a display controller **86**. Display **84** may be any one of a number of conventional display devices such as a liquid crystal display or a video display. For sharp colors and grayscale, display **84** is preferably an SVGA monitor, with a resolution of 26dpi or better, and an active area of at least 17 inches, controlled using a true color video card. High resolution, plain film may be displayed on a Matheus Medical Imaging Board (by Barco Corporation located in Duluth, Georgia) and greyscale display at 2048 x 2560 x 8 to 12 bits per pixel. Video display devices that allow for data to be clearly visualized according to the DICOM Standards are

contemplated as part of the present invention. In another embodiment, the receiving station **80** is a printer which may be Dicom-compatible and run either a non-proprietary or proprietary operations system (or a conventional Postscript™ printer).

Although **Figure 6** shows only one disassembly structure **60** and receiving station **80**, in variations of the network system **10**, any number of disassembly structures may communicate with the transmitter **20** in the same manner as disassembly structure **60**. Preferably the number of disassembly structures is one to several thousand units and more usually about 1 to 100 units. Any number of receiving stations **80** may also be present within a network system. In **Figure 7**, another embodiment of a secure network system **200** is shown with two modalities **12** in communication with a transmitter. The transmitter **20** communicates to two sites through separate disassembly structures **60** across a public network **16**. Site 3 communicates with a workstation and archive across a LAN and Site 4 communicates with a workstation across a separate LAN.

There are many alternative features that may be added to the secure network system **10** to advance the functionality of the system. Having described the overall system, some optional aspects of the system will now be discussed.

The transmitter **20** may include a firewall inserted between the transmitter and the public network **16** (e.g., the Internet) to establish a controlled link and to erect an outer security wall. All transmitted information must pass through the firewall to reach the disassembly structure **60**. The firewall may be a platform for IPSec using tunnel mode capabilities. Thus, a circuit level gateway may be established between the firewall and internal host and between the firewall and outside host.

Preferably, the firewall includes two network ports, e.g. Ethernet ports, in communication with each other. One of the network ports is at the data interface **22** and the other port is at the network interface **50**. Thus, data entering through the data interface **22** passes through the first network port and must also pass through the other port to exit the transmitter **20**. The firewall may restrict traffic, limit protocols and/or act as a proxy server

for some services. The firewall may additionally control direction, users and behavior of services. The firewall may include packet filtering with rules to determine whether to forward or discard and scrutinize applications.

In still other embodiments, the processing unit of the transmitter includes Domain Name System Security (DNSSec). DNSSec is provided to protect the dynamic update operation of DNS. A root name server located on the public network **16**, *e.g.*, the Internet, stores the addresses, *e.g.*, source IP addresses, for each disassembly structure **60** or other devices not behind the firewall, on the medical enterprise network as well as associated information needed for the receiving disassembly structure to process the data and relay the data to the appropriate receiving station **80**. For example, the root name server receives data packets traveling through the virtual private network and reads the port number of the source transmitter **20**. The server cross-references this port number to determine that the data from the transmitter is in the form of IP Security. The server informs the disassembly structure **60** that the data requires IP Security deprocessing.

An extension is developed to enable DNS authenticated public key distribution. Through such extensions, the receiving stations **80** may securely obtain autonomous system numbers for the public key mapping. The DNSSec extensions are further described in RFC 2065 by the Internet Engineering Task Force (IETF) and at Web site, www.ietf.org/internet-drafts/draft-ietf-dnssec-secext2-*.txt.

The secret key means of securing DNS transmission is described at Web site, www.ietf.org/internet-drafts/draft-ietf-dnssec-tsigsig-*.txt. DNSSec updating is described in RFC 2137 by the IETF and at Web site, www.ietf.org/internet-drafts/draft-ietf-dnssec-update2-00.txt.

In still further embodiments, the processing unit **44** of the transmitter **20** may provide for compression of data to conserve storage space and/or provides for the speedy transmission of data to the disassembly structure **60**, wherein the disassembly structure **60** may be used to decompress the data. Thus, for one embodiment, the processing unit **44** may

use various convenient algorithms that allow data files to shrink in order to compress the data. These algorithms tend to operate by replacing repeating patterns of data with smaller tokens. A header may be added to the data file as it is compressed for conveying information necessary in the reconstruction of the file when it is decompressed. In

5 addition, a header may be included which retains information on the way the data was attained and how one data representation, e.g., an image, relates to another representation in the same set of data, e.g., “series 1, image 39 and echo 2.”

Generally, compression formats are either high efficiency or low efficiency and either lossless or lossy. Lossy compression schemes are characterized by components of an
10 original image being absent from a reconstructed image after a compression-decompression cycle. Lossless schemes do not drop any information. Compression levels for any scheme may be chosen to be in compliance with the Food and Drug Administration (FDA) requirements for a particular application, e.g., diagnostics or referral quality.

Low compression schemes (i.e., those that do not provide significant compression
15 ratios) that may be used include joint photographic experts group (JPEG) compression schemes that use Fourier analysis-based methods, such as the discrete cosine transform, to compress data; graphics interchange format (GIF) compression schemes, which use LZW algorithms; bitmapped image compression schemes and tagged image file format (TIFF) compression schemes. Alternatively, high efficiency compression schemes, such as
20 wavelet, motion wavelet, Motion Picture Experts Group (MPEG) motion JPEG, Lempel Ziv and/or fractal compression schemes may be employed. Use of such high efficiency schemes may be preferred where storage space and/or transmission bandwidth is limited. For example, wavelet compression schemes may be 20 times more efficient than JPEG compression schemes, providing for a more detailed representation of the data at the same
25 bit budget.

In one embodiment, a progressive compression scheme is used prior to storage of data, wherein data is incrementally compressed to varying sizes. An advantage of

progressive compression is that where the data is prepared for transfer, the transmitter may pull the largest size of data that is capable of being compiled into a package. In this manner, truncation by intermediate hosts causing the loss of data segments is avoided. Moreover, the largest acceptable data size also provides the optimal resolution for the data when it is viewed.

In another embodiment, the processing unit **44** has stored information on the amount of compression and optionally the type of encryption, to be applied for each receiving station. This information may be included in the relational database **28**, where the compression and/or encryption information is listed for each station AE title.

In one alternative/optional embodiment, the transmitter **20** is configured to update information regarding new disassembly structures joining the network. An updating unit may attach additional AE titles and their related destinations and IP Addresses (such as alias AE titles) for such new disassembly structures to the relational database **28** and create a distributed database architecture between transmitters **20**. The updating unit may receive information by a user manual inputting the new information or by using various known distributed database architecture, such as synchronous asymmetric replication (SAR) and CORBA techniques to update the database with new information. With use of these techniques, the updating unit may manage the distribution of new information across a VPN, WAN, LAN and/or between two or more transmitters **20**. The new alias information may be established by and stored in a database in a disassembly structure **60**. The disassembly structure **60** preferably notifies all other disassembly structures and transmitters on the network of the existence of the information. The SAR technology may also use complex rules and algorithms to regulate the sequence of data updates and to recover from interruption in communication links between transmitters in a geographically distributed network.

The present invention has been described above in varied detail by reference to particular embodiments and figures. However, these specifics should not be construed as

CLAIMS

What is claimed is:

1 1. A medical information transmitter comprising:

2 A) a data interface for acquiring a medical data file having an application
3 entity title;

4 B) an assembly unit configured to assemble the medical data to form data
5 packets;

6 C) a remapping unit configured to attach an address to the packets for
7 identifying a disassembly structure;

8 D) a processing unit configured to encrypt the packets across protocol layers
9 for decryption by the disassembly structure; and

10 E) a network interface configured to transmit the packets into a public
11 network for receipt at the disassembly structure.

1 2. The information transmitter of claim 1, wherein the processing unit is further
2 configured to authenticate the packets across protocol layers.

1 3. The information transmitter of claim 2, wherein the processing unit is further
2 configured to provide key management to the packets across protocol layers.

1 4. The information transmitter of claim 1, wherein the processing unit is configured to
2 encrypt the packets in a manner compliant with IP Security Standards.

1 5. The information transmitter of claim 1, wherein the processing unit is configured to
2 authenticate and provide key management in a manner compliant with IP Security
3 Standards.

1 6. The information transmitter of claim 4, wherein the processing unit is further
2 configured to encapsulate each of the packets into outer packets.

1 7. The information transmitter of claim 1, further including a firewall.

1 8. The information transmitter of claim 7, wherein the firewall includes a first network port
2 at the data interface and a second network port at the network interface.

1 9. The information transmitter of claim 1, wherein the remapping unit attaches the
2 address by:

3 (i) examining the packet content;

4 (ii) determining a receiving station based on the content;

5 (iii) determining the address that identifies the disassembly structure
6 associated with the receiving station; and

7 (iv) attaching the address to the packets.

1 10. The information transmitter of claim 1, wherein the attached address is an alias AE
2 title and the remapping unit is configured to attach the alias AE title by:

3 (i) accepting an AE title that identifies a receiving station;

4 (ii) cross-referencing from a relational database, the AE title with the
5 alias AE title that identifies a disassembly structure associated with
6 the receiving station; and

7 (iii) attaching the alias AE title to the packets.

1 11. The information transmitter of claim 1, wherein the attached address is a routable IP
2 address and the remapping unit is configured as an NAT to attach the routable IP
3 address by:

4 (i) accepting a private IP address that identifies a receiving station;

5 (ii) cross-referencing from a relational database, the private IP address
6 with the routable IP address that identifies a disassembly structure
7 associated with the receiving station; and

8 (iii) attaching the routable IP address to the packets.

1 12. The information transmitter of claim 10, further comprising an updating unit for
2 adding the alias AE titles to the relational database.

1 13. The information transmitter of claim 12, wherein the updating unit adds the alias
2 AE titles to the relational database by synchronous asymmetric replication.

1 14. The information transmitter of claim 1, wherein the public network comprises
2 conventional telephone lines, ADSL, ISDN, fiber optic cables, ATM network links,
3 DSL connections, satellite links, or a combination thereof.

1 15. The information transmitter of claim 1, wherein the assembly unit is further
2 configured to assemble between 0.1 megabyte and 5.0 megabyte portions of medical
3 data into each of the packets.

1 16. The information transmitter of claim 1, wherein the assembly unit is further
2 configured to assemble between 50 bytes and 500 bytes portions of medical data
3 into each of the packets.

1 17. The information transmitter of claim 1, further comprising an acknowledgement
2 unit configured to receive confirmation of completed packet transfers from the
3 disassembly structure within a threshold time.

1 18. The information transmitter of claim 16, wherein the acknowledgment unit is
2 further configured to cause the information transmitter to resend only those portions
3 of the data file to which no acknowledgments are received within the threshold
4 time.

1 19. The information transmitter of claim 1, wherein the medical data file comprises
2 text, image, overlay, 3-D volume, waveform, curve, video, and/or sound data, or
3 any combination thereof.

1 20. The information transmitter of claim 19, wherein the medical data file is of a form
2 conformant with the DICOM Standards and/or HL7 Standards.

1 21. A medical virtual private network system comprising:

2 A) a medical modality configured to generate medical data and
3 comprising a mapping unit for attaching an application entity title to the medical
4 data for identifying a medical information transmitter;

5 B) the medical information transmitter comprising:

6 (i) a data interface communicatively coupled to the medical
7 modality for acquiring the medical data from the medical
8 modality;

9 (ii) an assembly unit configured to assemble the medical data to
10 form data packets;

- 11 (iii) a remapping unit configured to attach an address to the
12 packets for identifying a disassembly structure;
- 13 (iv) a processing unit configured to encrypt the packets for
14 decryption by the disassembly structure; and
- 15 (v) a network interface configured to send the packets into a
16 public network for receipt at the disassembly structure.

1 22. The network system of claim 21, wherein the medical modality comprises radiology
2 equipment.

1 23. The network system of claim 21, further comprising a plurality of medical
2 modalities.

1 24. The network system of claim 21, further comprising a disassembly structure
2 configured to decrypt the packets.

1 25. The network system of claim 24, further comprising a plurality of disassembly
2 structures.

1 26. The network system of claim 24, wherein the disassembly structure is a second
2 medical information transmitter.

1 27. The network system of claim 24, further comprising a receiving station.

1 28. The network system of claim 24, further comprising a plurality of receiving stations.

1 29. A computer readable medium having stored therein a plurality of sequences of
2 instructions, which, when executed by a processor in a transmitter, cause the
3 processor to:

4 A) assemble medical data into packets;

5 B) attach an address to the packets for identifying a disassembly structure;

6 C) encrypt the packets across protocol layers for decryption by the disassembly
7 structure; and

8 D) send the packets into a public network for receipt at the disassembly
9 structure.

1 30. The computer readable medium of claim 29, further including additional sequences
2 of instructions, which, when executed by the processor, cause the processor to
3 authenticate the packets across protocol layers.

1 31. The computer readable medium of claim 30, further including additional sequences
2 of instructions, which, when executed by the processor, cause the processor to
3 provide key management to the packets across protocol layers.

1 32. The computer readable medium of claim 29, wherein the encryption is compliant
2 with IP Security Standards.

1 33. The computer readable medium of claim 31, wherein the authentication and key
2 management are compliant with IP Security Standards.

1 34. The computer readable medium of claim 29, wherein the address is an alias AE title
2 and the attaching of the address is by:

- 3 (i) accepting an AE title that identifies a receiving station;
- 4 (ii) cross-referencing from a relational database, the AE title with the
5 alias AE title that identifies a disassembly structure associated with
6 the receiving station; and
- 7 (iii) attaching the alias AE title to the packets.

1 35. The computer readable medium of claim 29, wherein the address is a routable IP
2 address and the attaching of the address is by NAT including the steps of:

- 3 (i) accepting a private IP address that identifies a receiving station;
- 4 (ii) cross-referencing from a relational database, the private IP address
5 with the routable IP address that identifies a disassembly structure
6 associated with the receiving station; and
- 7 (iii) attaching the routable IP address to the packets.

1 36. Computer readable instructions, which when executed cause a processor to:

2 A) assemble medical data into packets;

3 B) attach an address to the packets for identifying a disassembly
4 structure;

5 C) encrypt the packets across protocol layers for decryption by the
6 disassembly structure; and

7 D) send the packets into a public network for receipt at the disassembly
8 structure.

1 37. The computer readable instructions of claim 36, wherein the address is an alias AE
2 title and the attaching of the address is by:

3 (i) accepting an AE title that identifies a receiving station;

4 (ii) cross-referencing from a relational database, the AE title with the
5 alias AE title that identifies a disassembly structure associated with
6 the receiving station; and

7 (iii) attaching the alias AE title to the packets.

1 38. The computer readable instructions of claim 36, wherein the address is a routable IP
2 address and the attaching of the address is by NAT including the steps of:

- 3 (i) accepting a private IP address that identifies a receiving station;
- 4 (ii) cross-referencing from a relational database, the private IP address
- 5 with the routable IP address that identifies a disassembly structure
- 6 associated with the receiving station; and
- 7 (iii) attaching the routable IP address to the packets.

1 39. A method, comprising the steps of:

- 2 A) assembling medical data into packets;
- 3 B) attaching an address to the packets for identifying a disassembly
- 4 structure;
- 5 C) encrypting the packets across protocol layers for decryption by the
- 6 disassembly structure; and
- 7 D) sending the packets into a public network for receipt at the
- 8 disassembly structure.

1 40. The method of claim 39, further including the step of compressing the packets using

2 at least one of a wavelet, a motion wavelet, an MPEG, a motion JPEG, a Lempel

3 Ziv or fractal compression scheme.

1 42. The method of claim 39, wherein the step of encrypting is compliant with IPsec

2 Standards.

1 43. The method of claim 42, further including the step of encapsulating the packet into
2 an outer packet.

1 44. The method of claim 43, wherein the outer packet includes an encryption field.

1 45. The method of claim 39, wherein the address is an alias AE title and the attaching of
2 the address includes the steps of:

- 3 (i) accepting an AE title that identifies a receiving station;
- 4 (ii) cross-referencing from a relational database, the AE title with the
5 alias AE title that identifies a disassembly structure associated with
6 the receiving station; and
- 7 (iii) attaching the alias AE title to the packets.

1 46. The method of claim 39, wherein the address is a routable IP address and the
2 attaching of the address is by NAT and includes the steps of:

- 3 (i) accepting a private IP address that identifies a receiving station;
- 4 (ii) cross-referencing from a relational database, the private IP address
5 with the routable IP address that identifies a disassembly structure
6 associated with the receiving station; and
- 7 (iii) attaching the routable IP address to the packets.

1 47. The method of claim 39, further including the step of converting the medical data to
2 be compliant with the DICOM Standards after the packets are received at the
3 disassembly structure.

1 48. A method of transmitting medical information comprising:

- 2 A) assembling a medical data file into packets;
3 B) sending the packets into a public network for receipt at a disassembly
4 structure;
5 C) considering whether an acknowledgement of completed packet transfer
6 is received from the disassembly structure within a threshold time; and
7 D) resending into the public network only that portion of the medical data
8 file to which no acknowledgment is received within the threshold time.

1 49. The method of claim 48, wherein between 0.1 megabytes and 5.0 megabytes of
2 medical data is assembled into each packet.

1 50. A method acquiring medical information comprising:

- 2 A) receiving packets comprising medical information sent by sent by a
3 transmitter across a public network;
4 B) sending acknowledgments of successful transfer to the transmitter;
5 C) decrypting the packet to reveal an address of a receiving station;

6 D) transferring the medical information to the receiving station.

1 51. The method of claim 50, wherein the revealed address is an AE title of a receiving
2 station.

1 52. The method of claim 50, further including the step of converting the medical
2 information to be compliant with the DICOM Standards prior to transferring the
3 information to the receiving station.

Continued on next page

ABSTRACT

The assembly and communication of medical information from a variety of modalities to remote stations through a public network is provided for by the combined use of a transmitter and disassembly structure. The transmitter includes an assembly unit for gathering data into packets and a processing unit to provide security for transfer. The 5 disassembly structure reconfigures the data for relay to a receiving station. Mechanisms are provided for conserving the transfer time from transmitter to disassembly structure.

5
10
15
20
25
30
35
40
45
50
55
60
65
70
75
80
85
90
95
100
105
110
115
120
125
130
135
140
145
150
155
160
165
170
175
180
185
190
195
200
205
210
215
220
225
230
235
240
245
250
255
260
265
270
275
280
285
290
295
300
305
310
315
320
325
330
335
340
345
350
355
360
365
370
375
380
385
390
395
400
405
410
415
420
425
430
435
440
445
450
455
460
465
470
475
480
485
490
495
500

10

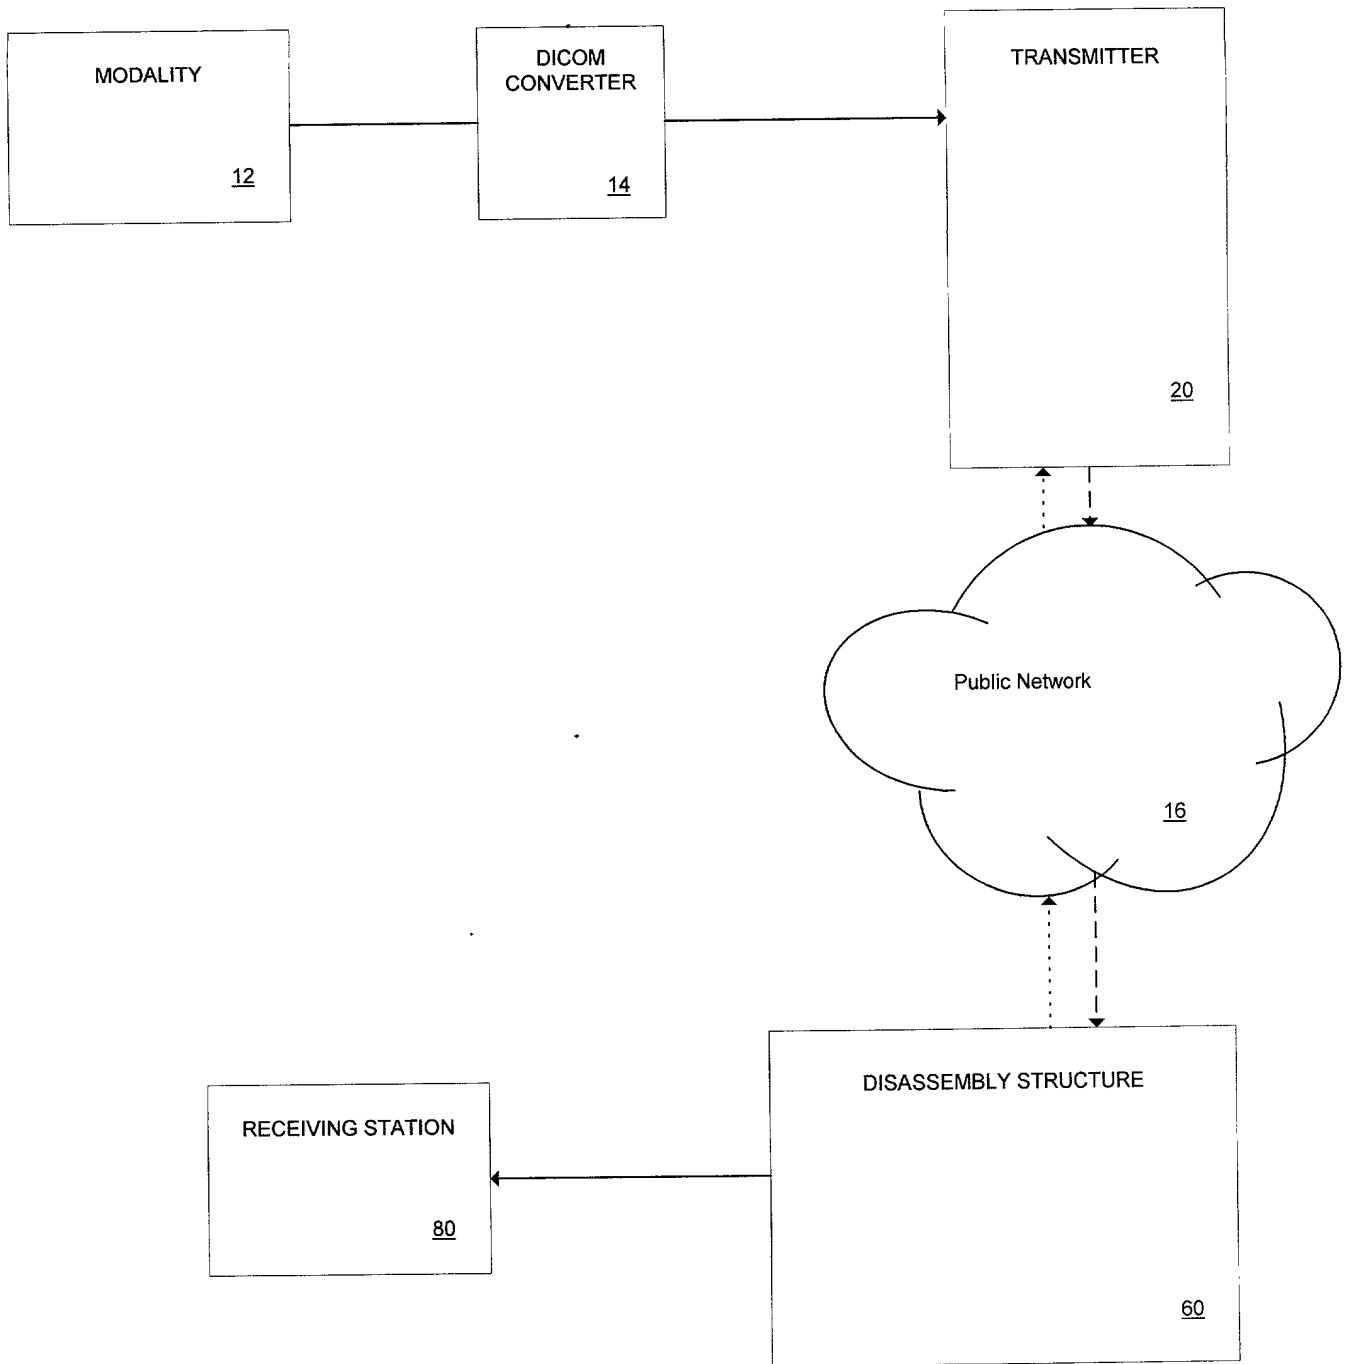


FIG.1

FIG. 2

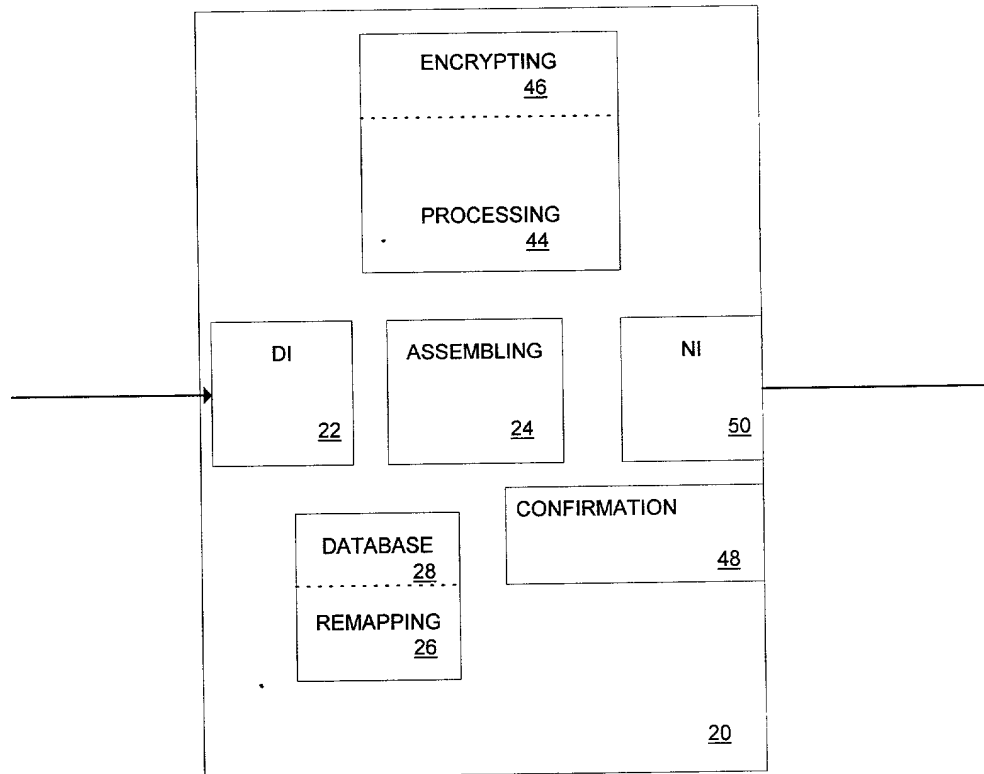


FIG. 3

28

ALIAS AE TITLE Receiving Station <u>30</u>	COMPRESS <u>38</u>	ENCRYPT <u>40</u>	AE TITLE Disassembly St <u>32</u>	IP ADDRESS Disassembly St <u>34</u>	PORT # Disassembly St <u>36</u>
WS-SiteB	3:1	DNSSec 3des	Disasem 3	1.2.3.7	104
Archiv-SiteB	3:1	IPSec 3	Disasem 3	1.2 3 7	104
WS-SiteC	2:1	IPSec 3	Disassem 4	1.24.7	104

FIG. 4A

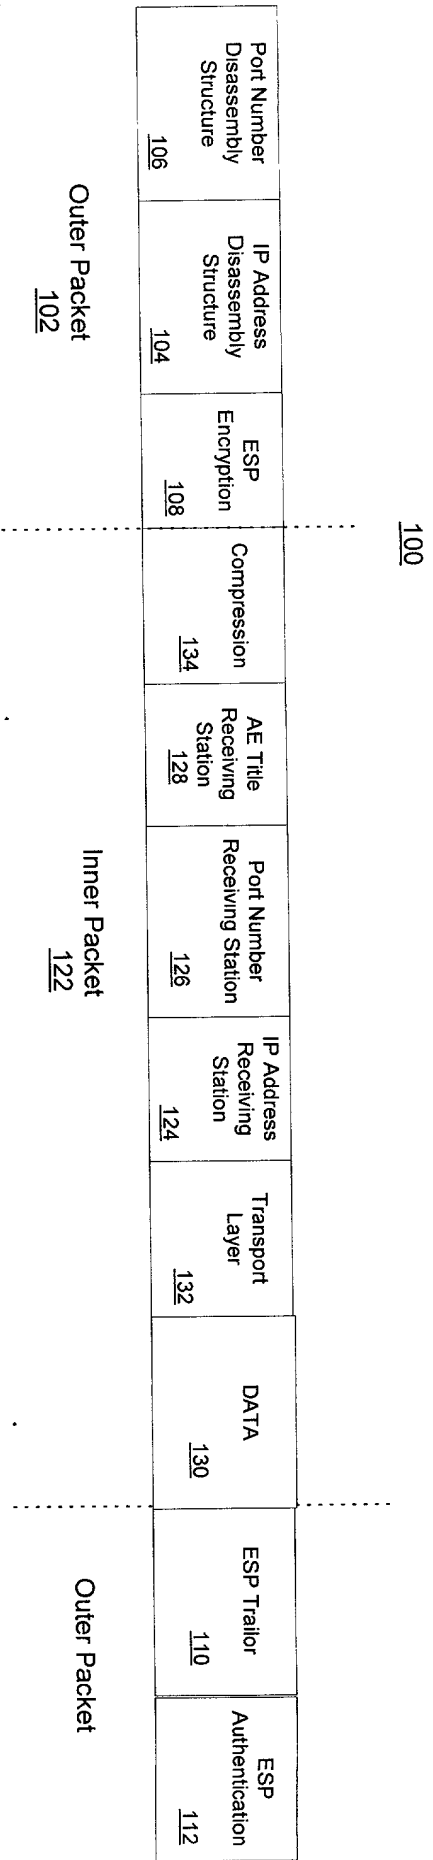


FIG. 4B

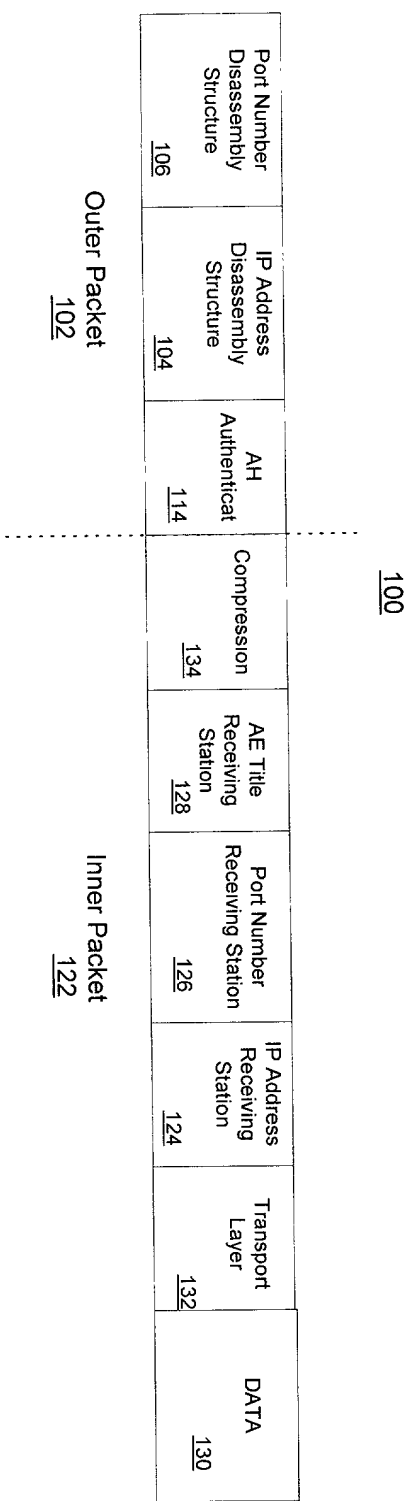


FIG. 5A

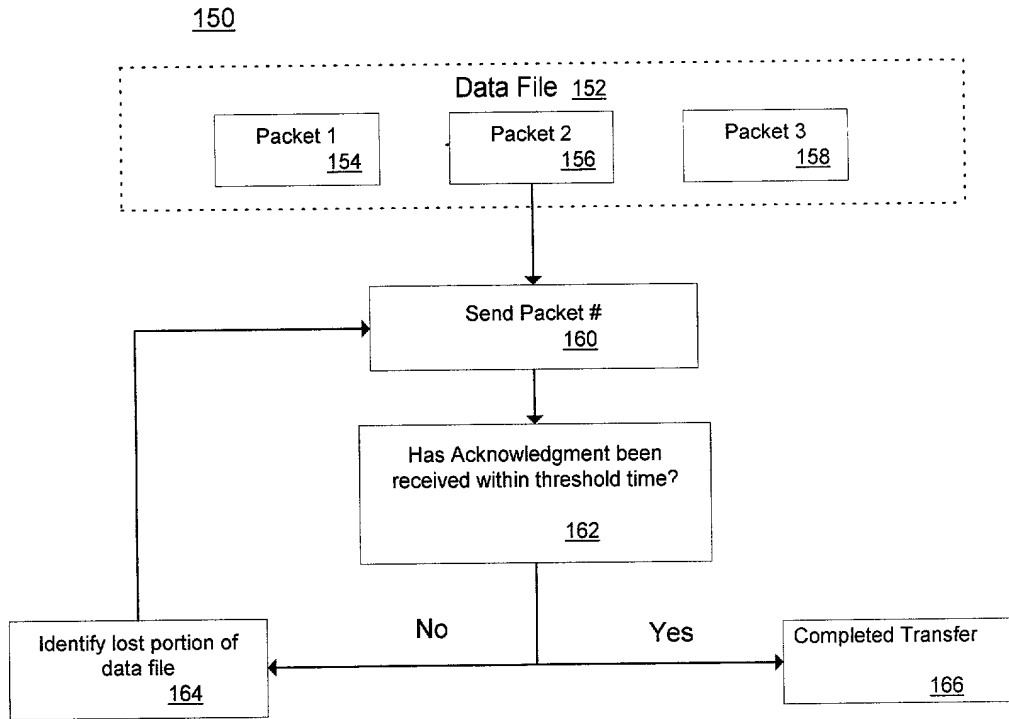


FIG. 5B

Prior Art

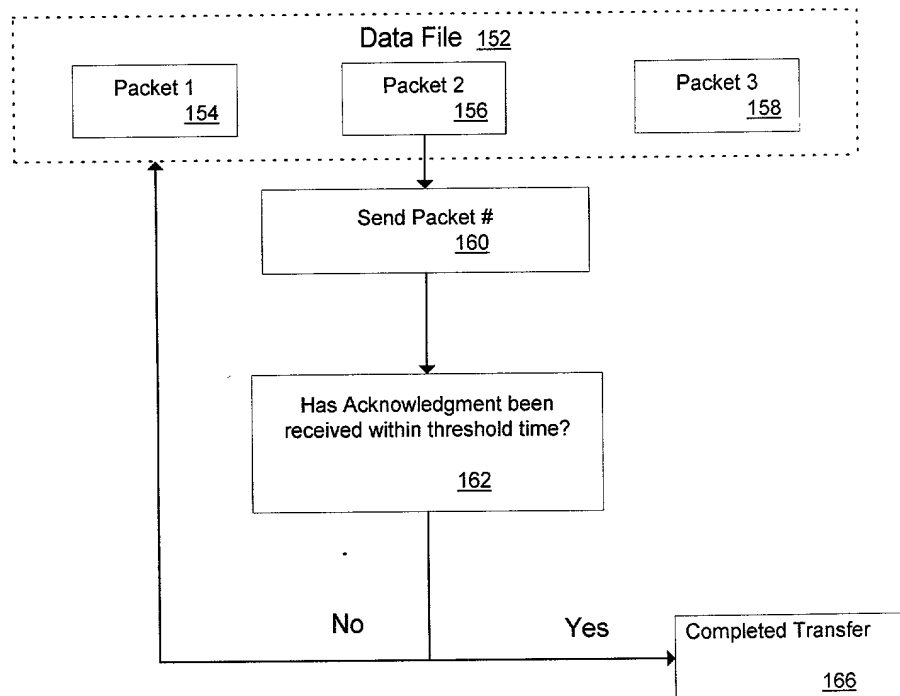
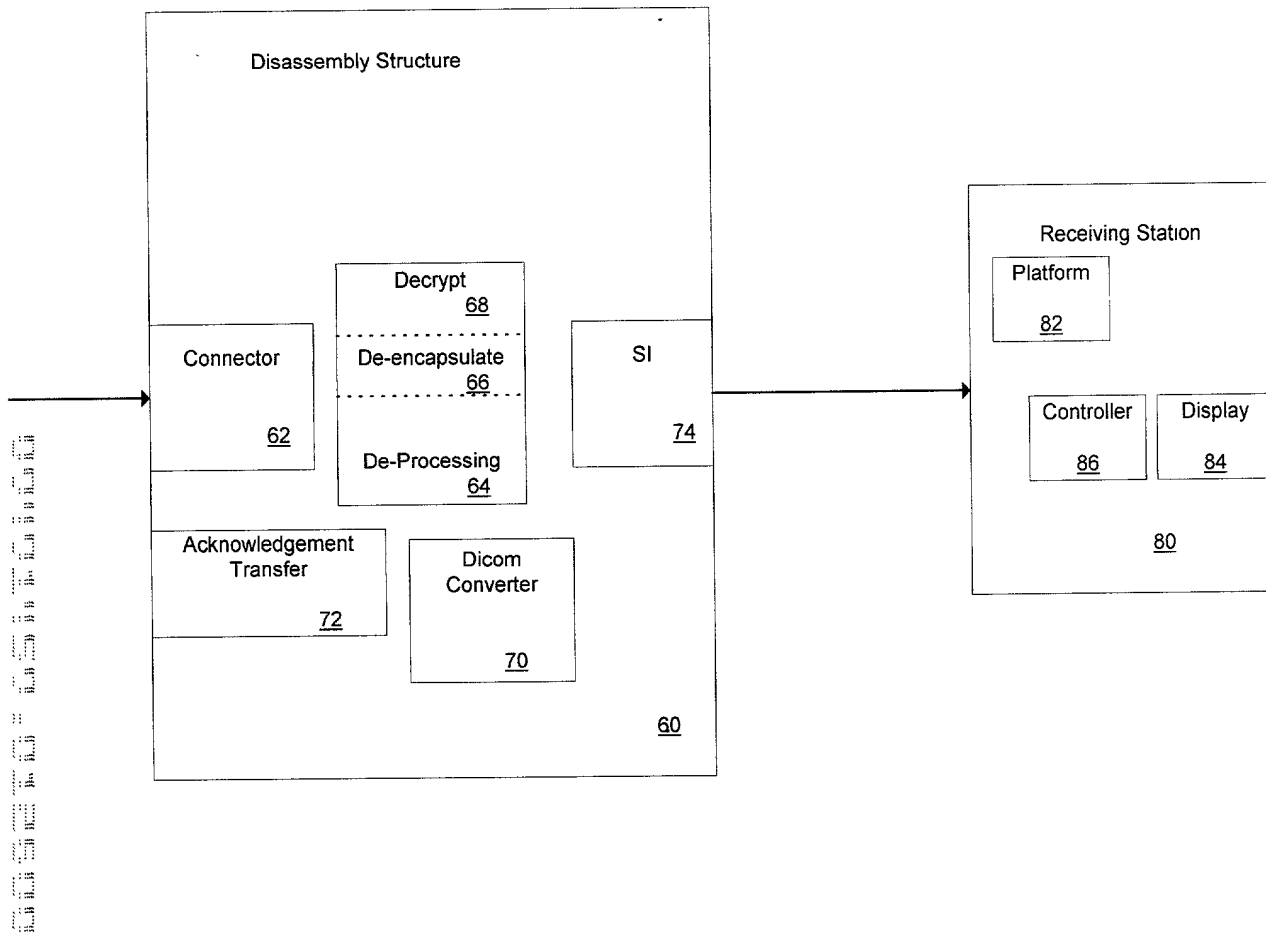


FIG. 6



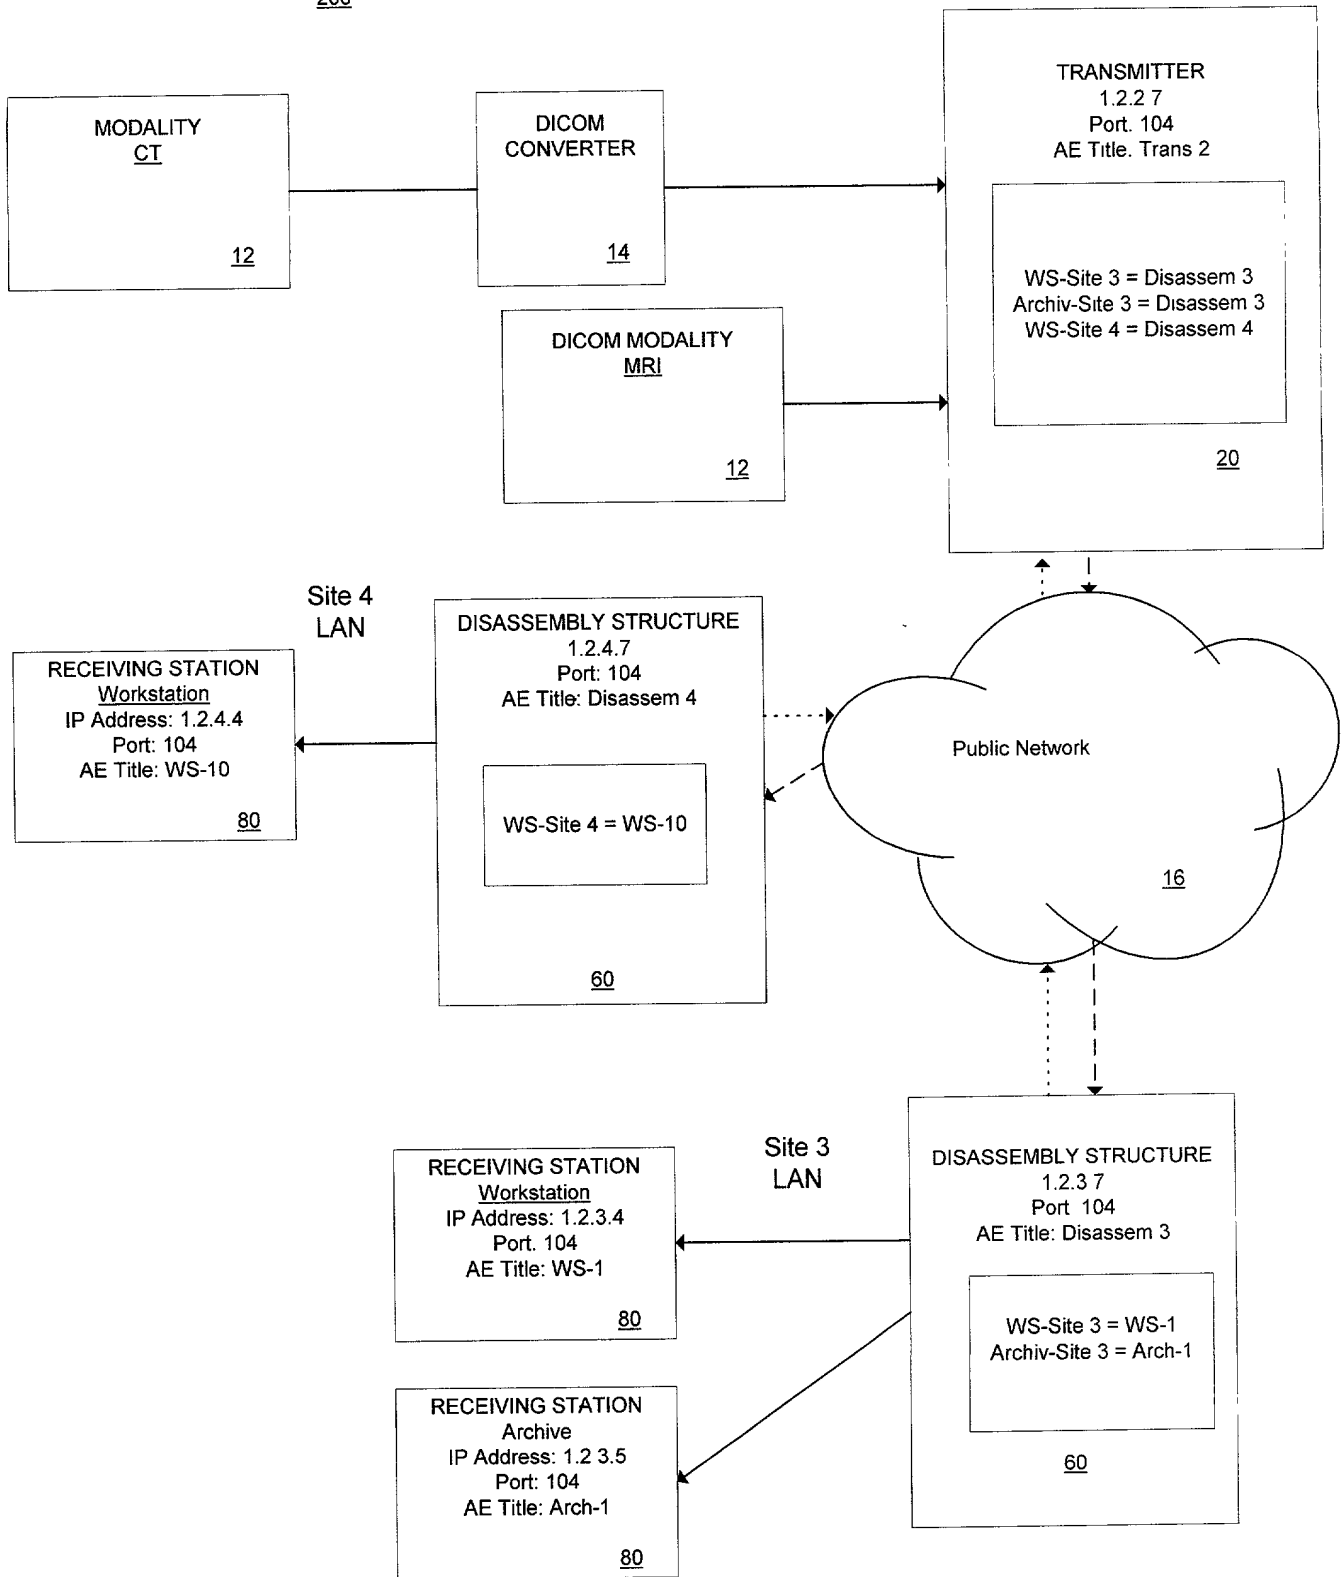


FIG.7

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below, next to my name.

I believe I am the original, first, and sole inventor (if only one name is listed below) or an original, first, and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

SECURE NETWORK SYSTEM AND METHOD FOR TRANSFER OF MEDICAL INFORMATION

the specification of which

x is attached hereto.
_____ was filed on _____ as
United States Application Number _____
or PCT International Application Number _____
and was amended on _____
(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claim(s), as amended by any amendment referred to above.

I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d), of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

<u>Prior Foreign Application(s)</u>			<u>Priority Claimed</u>	
<u>(Number)</u>	<u>(Country)</u>	<u>(Day/Month/Year Filed)</u>	<u>Yes</u>	<u>No</u>
<u>(Number)</u>	<u>(Country)</u>	<u>(Day/Month/Year Filed)</u>	<u>Yes</u>	<u>No</u>
<u>(Number)</u>	<u>(Country)</u>	<u>(Day/Month/Year Filed)</u>	<u>Yes</u>	<u>No</u>
<u>(Number)</u>	<u>(Country)</u>	<u>(Day/Month/Year Filed)</u>	<u>Yes</u>	<u>No</u>

I hereby claim the benefit under title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below

<u>60/120,823</u>	<u>February 19, 1999</u>
(Application Number)	Filing Date

_____	_____
(Application Number)	Filing Date

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

_____	_____	_____
(Application Number)	Filing Date	(Status -- patented, pending, abandoned)

_____	_____	_____
(Application Number)	Filing Date	(Status -- patented, pending, abandoned)

I hereby appoint Farzad E. Amini, Reg. No. P42,261; Aloysius T. C. AuYeung, Reg. No. 35,432; Amy M. Armstrong, Reg. No. P42,265; William Thomas Babbitt, Reg. No. 39,591; Jordan Michael Becker, Reg. No. 39,602; Bradley J. Berezna, Reg. No. 33,474; Michael A. Bernadicou, Reg. No. 35,934; Roger W. Blakely, Jr., Reg. No. 25,831; Gregory D. Caldwell, Reg. No. 39,926; Yong S. Choi, Reg. No. P43,324; Thomas M. Coester, Reg. No. 39,637; William Donald Davis, Reg. No. 38,428; Michael Anthony DeSanctis, Reg. No. 39,957; Daniel M. De Vos, Reg. No. 37,813; Tarek N. Fahmi, Reg. No. 41,402; James Y. Go, Reg. No. 40,621; Dinu Gruia, Reg. No. P42,996; David R. Halvorson, Reg. No. 33,395; Thomas A. Hassing, Reg. No. 36,159; Eric Ho, Reg. No. 39,711; Willmore F. Holbrow III, Reg. No. P41,845; George W. Hoover II, Reg. No. 32,992; Eric S. Hyman, Reg. No. 30,139; Dag H. Johansen, Reg. No. 36,172; William W. Kidd, Reg. No. 31,772; Tim L. Kitchen, Reg. No. P41,900; Michael J. Mallie, Reg. No. 36,591; Andre L. Marais, under 37 C.F.R. § 10.9(b); Paul A. Mendonsa, Reg. No. P42,879; Darren J. Milliken, P42,004; Thinh V. Nguyen, P42,034; Kimberley G. Nobles, Reg. No. 38,255; Ronald W. Reagin, Reg. No. 20,340; Babak Redjaian, P42,096; James H. Salter, Reg. No. 35,668; William W. Schaal, Reg. No. 39,018; James C. Scheller, Reg. No. 31,195; Anand Sethuraman, Reg. No. P43,351; Charles E. Shemwell, Reg. No. 40,171; Maria McCormack Sobrino, Reg. No. 31,639; Stanley W. Sokoloff, Reg. No. 25,128; Allan T. Sponseller, Reg. No. 38,318; Steven R. Sponseller, Reg. No. 39,384; Geoffrey T. Staniford, P43,151; Judith A. Szepesi, Reg. No. 39,393; Vincent P. Tassinari, Reg. No. P42,179; Edwin H. Taylor, Reg. No. 25,129; George G. C. Tseng, Reg. No. 41,355; Lester J. Vincent, Reg. No. 31,460; John Patrick Ward, Reg. No. 40,216; Stephen Warhola, Reg. No. P43,237; Ben J. Yorks, Reg. No. 33,609; and Norman Zafman, Reg. No. 26,250; my attorneys; and Robert Andrew Diehl, Reg. No. 40,992; and Edwin A. Sloane, Reg. No. 34,728; my patent agents, of BLAKELY, SOKOLOFF, TAYLOR & ZAFMAN LLP, with offices located at 12400 Wilshire Boulevard, 7th Floor, Los Angeles, California 90025, telephone (310) 207-3800, and James R. Thein, Reg. No. 31,710, and Lisa N. Benado, Reg. No. 39,905 my patent attorneys; with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith.

Address all communications to Tarek N. Fahmi, Reg. No. 41,402, BLAKELY, SOKOLOFF, TAYLOR & ZAFMAN LLP, 12400 Wilshire Boulevard, 7th Floor, Los Angeles, California 90025, telephone (408) 720-8598.

[illegible]

First Inventor Peter M. Killcommons

Date _____

1/20/2000

Citizenship

USA

(Country)

132 Beaumont.

San Francisco, California 94107

Title 37, Code of Federal Regulations, Section 1.56
Duty to Disclose Information Material to Patentability

(a) A patent by its very nature is affected with a public interest. The public interest is best served, and the most effective patent examination occurs when, at the time an application is being examined, the Office is aware of and evaluates the teachings of all information material to patentability. Each individual associated with the filing and prosecution of a patent application has a duty of candor and good faith in dealing with the Office, which includes a duty to disclose to the Office all information known to that individual to be material to patentability as defined in this section. The duty to disclose information exists with respect to each pending claim until the claim is cancelled or withdrawn from consideration, or the application becomes abandoned. Information material to the patentability of a claim that is cancelled or withdrawn from consideration need not be submitted if the information is not material to the patentability of any claim remaining under consideration in the application. There is no duty to submit information which is not material to the patentability of any existing claim. The duty to disclose all information known to be material to patentability is deemed to be satisfied if all information known to be material to patentability of any claim issued in a patent was cited by the Office or submitted to the Office in the manner prescribed by §§1.97(b)-(d) and 1.98. However, no patent will be granted on an application in connection with which fraud on the Office was practiced or attempted or the duty of disclosure was violated through bad faith or intentional misconduct. The Office encourages applicants to carefully examine:

(1) Prior art cited in search reports of a foreign patent office in a counterpart application, and

(2) The closest information over which individuals associated with the filing or prosecution of a patent application believe any pending claim patentably defines, to make sure that any material information contained therein is disclosed to the Office.

(b) Under this section, information is material to patentability when it is not cumulative to information already of record or being made of record in the application, and

(1) It establishes, by itself or in combination with other information, a prima facie case of unpatentability of a claim; or

(2) It refutes, or is inconsistent with, a position the applicant takes in:

(i) Opposing an argument of unpatentability relied on by the Office, or

(ii) Asserting an argument of patentability.

A prima facie case of unpatentability is established when the information compels a conclusion that a claim is unpatentable under the preponderance of evidence, burden-of-proof standard, giving each term in the claim its broadest reasonable construction consistent with the specification, and before any consideration is given to evidence which may be submitted in an attempt to establish a contrary conclusion of patentability.

(c) Individuals associated with the filing or prosecution of a patent application within the meaning of this section are:

(1) Each inventor named in the application;

(2) Each attorney or agent who prepares or prosecutes the application; and

(3) Every other person who is substantively involved in the preparation or prosecution of the application and who is associated with the inventor, with the assignee or with anyone to whom there is an obligation to assign the application.

(d) Individuals other than the attorney, agent or inventor may comply with this section by disclosing information to the attorney, agent, or inventor.